


AMPHIBICO INC.
Underwater Video Light

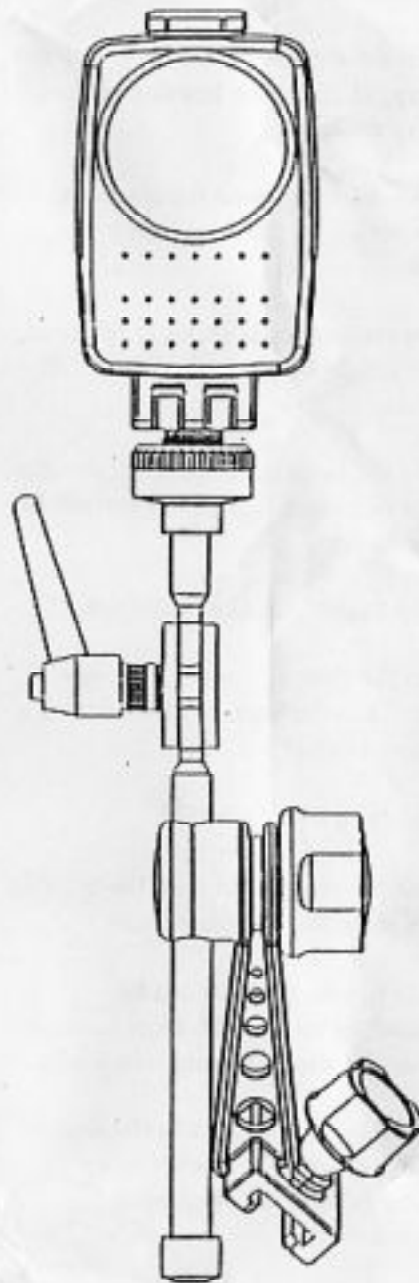

Operating Instructions

Battery Installation:

Open the Video Light housing by turning the top latch counter-clockwise on half turn.

Install a fully charged SONY NP80, NP90, battery, aligning the housing and NP90D, NP98D battery contacts.

Press the battery onto the retaining plate until it clicks firmly into place.

When the battery is securely installed, test the light by pressing the On/Off buttons.

While the housing is open, inspect the two o-rings and the sealing surface for dirt or debris.

Apply a small amount of lubricant.



Close the light and engage the top latch. Turn the latch clockwise until a positive click is felt.

Video Arm adjustment:

Install the video light onto the housing and tighten the retaining knob.

The light arm position can be adjusted by turning the large knob(a) and the handle(b) counter-clockwise.

When the video light is in the desired position, lock it into position by turning (a) and (b) clockwise.

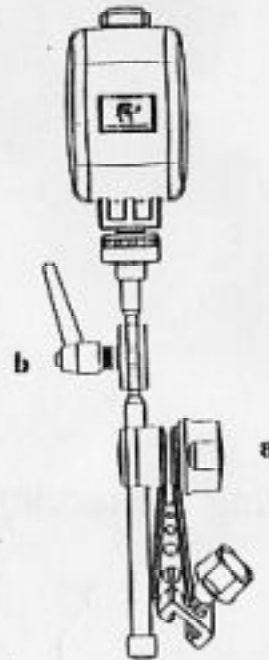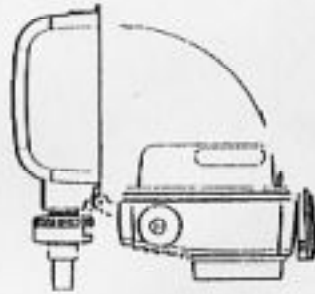

Light Bulb Removal or Replacement:

While holding the light firmly, grasp the exterior of the lens assembly. Turn the lens assembly counter-clockwise and pull straight out. The bulb is now exposed and can be easily pulled out and replaced. Always clean the new bulb with a tissue and alcohol.

Prior to replacing the lens assembly, inspect the o-rings and lubricate if necessary.

Align the bayonet mounts and push the lens assembly into the video light housing. Turn the lens assembly clockwise to lock it into position.

Operation:


This video light is designed as a fill-in light to highlight color and to produce a more natural color balance.

The video light can be used with the (optional) blue filter during daylight dives. This will counterbalance the red filter when used on the camera. With the 20 watt bulb installed the light can be used as a home or recreational video light.

The optional 30 watt bulb is to be used underwater only. During storage or transit remove the battery to prevent accidental discharge.

Maintenance:

After each dive, rinse the housing in fresh water and towel dry. Inspect and lubricate o-rings and sealing surfaces as required. Do not clean with harsh chemicals or solvents.

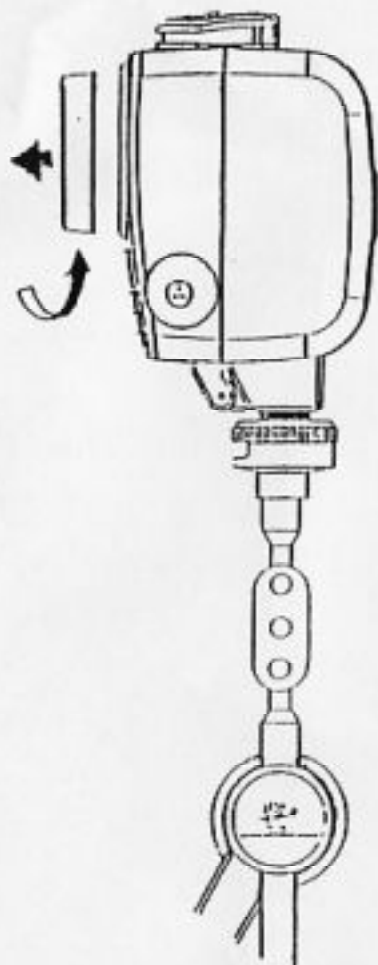



New Address effective June 7th, 1999:
459 Deslauriers
St-Laurent, Quebec H4N 1W2 (Canada)
Tel: (514) 333-8666 Fax: (514) 333-1339